


**Product Code: AX-RM1c...Series
Interface Relays**

AXIO



FEATURES

- **AC & DC Coils (Various Voltages)**
- **1 x 12A/250Vac SPCO Contact**
- **Sensitive Coil Version for 10V dc (10A Contact)**
- **Retainer Clip with Ejector Function**
- **DIN Rail Mounting (TS35)**
- **High Quality Rising Clamp Terminals with captive screws**
- **Optional LED and Protection Modules**

The AX-RM1c...Series comprises a range of relays mounted in DIN Rail bases. A version with a 10A/250Vac SPCO contact is available with high sensitivity, 12V dc (250mW), coil suitable for use with the 0-10Vdc output from a BMS Controller. Other variants, with 12A/250Vac contacts, are available with 24V dc, 24V ac, 110V ac and 230V ac coils.

Designed to mount on TS35 Section DIN Rail.

Specification


Contact Configuration	1 x SPCO
Rated Current	12A (10A for AX-RM1c-12DC)
Rated Voltage	250V ac
Max Breaking Voltage	440V ac
Rated Breaking Capacity	3000VA (2500VA for MR1c-12DC)
Dielectric Strength (coil/contact)	>4000V^{rms}
Contact Material	AgNi 90/10
Insulation Category (VDE0110b)	C/250V ac
Ambient Temperature	-25°C...85°C
Protection Category	IP20
Wire Cross Section	2 x 2.5mm²
With bootlace ferrule	2 x 1.5mm²

Function and Protection Modules

Order Code	Type
MR1T00A0	Protection Diode ¹
MR1U0548	RC Network 24..48Vac
MR1U0730	RC Network 110..230Vac
MR1L0024	LED 12..24V dc with protection diode ¹
MR1L0524	LED 12..48V dc/ac
MR1L0730	LED 110..230V ac

¹Standard Polarity: A1 = (+), A2 = (-)

Model	Nominal Coil Voltage	Coil Resistance	Coil Current	Contact Rating @250Vac (Resistive)
AX-RM1c-12DC	12(10)V dc	576R+/-10%	20.8mA	10A
AX-RM1c-24DC	24V dc	1440R+/-10%	16.7mA	12A
AX-RM1c-24AC	24V ac	350R+/-10%	31.6mA	12A
AX-RM1c-115AC	115V ac	8100R+/-15%	6.6mA	12A
AX-RM1c-230AC	230V ac	32500R+/-15%	3.2mA	12A

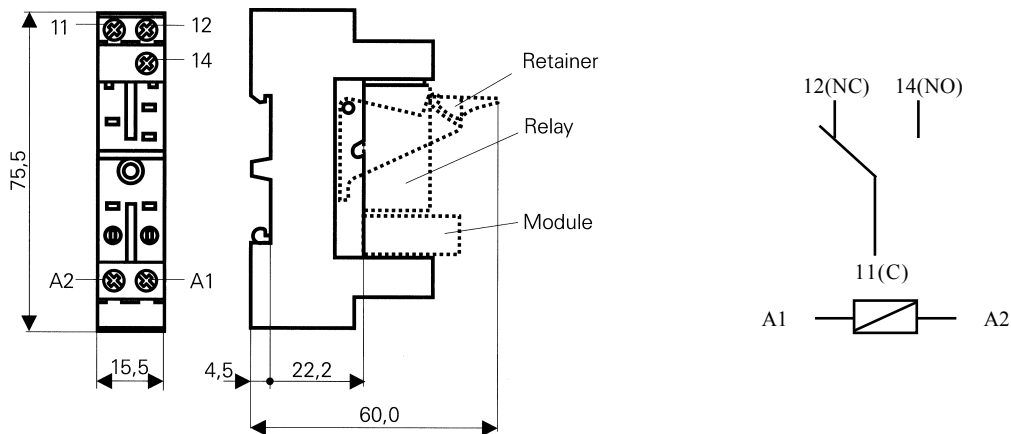

Every effort has been taken in the production of this data sheet to ensure it's accuracy. Axio can not, however, accept responsibility for any damage, expense, injury, loss or consequential loss resulting from any errors or omissions. Axio has a policy of continuous improvement and reserves the right to change this specification without notice.

Data Sheet Ref: 619801 27/11/00 ©Axio 2000

7, Mount Mews
Hampton
Middlesex
TW12 2SH
Email: sales@axio.co.uk
Tel: 0870 2417430
Fax: 0208 3950742

AXIO